

Thermo Scientific RadHalo RDP and FM

Sensitive and accurate dose rate monitors that identify radiation quickly and accurately, in any environment

Key Features:

- Fixed (FM Model; Environmental Enclosure) and Portable (RDP Model; Drop Probe) Options: Suitable for fixed boundary or portable/mobile applications
- Immediate Isotopic Identification: Powerful identification algorithm with detection hardware provides fast and accurate gamma ID and analysis
- Wide Dose Rate Monitoring Range: The dual-range Geiger Mueller (GM) detection system provides monitoring capability from low-level environmental ($\mu\text{R/hr}$) to high-level accident ranges (1000 R/hr)
- Versatile Communication Pathways: Standard GSM, 2.4 GHz, Wifi; and LAN options; Secure Transmission; 1024 bit encryption available
- Rugged and Autonomous Design: Designed to operate across all environmental temperature and weather conditions; 60 hr battery life in portable option allows for true "Drop and Go" functionality
- E-Plan/Map-based Monitoring Software; Flexible Software Monitoring Solutions Available; 'Easy to Use' user-interface provides Live Time, and/or Historic viewing capability; Server and web-based applications available




The Thermo Scientific™ RadHalo™ RDP and FM detect and identify gamma and neutron radiation as well as provide accurate dose rate capability. With multiple configurations available RadHalo can adapt to any situation and budget from special event monitoring to rapid response for a nuclear power accident.

RadHalo's powerful processor runs simultaneous high accuracy dose rate and identification algorithms for high confidence measurements, whether you are monitoring radiation levels in a normal or emergency situation or whether you are using RadHalo to adjudicate a radiological alarm at a sporting event. RadHalo can be configured to monitor and provide dose rate and count rate values and if an alarm occurs, it provides an automatic identification which is ideal for a security function. It can also be configured to provide a dose rate and spectrum

automatically at defined intervals, ideally suited for radiation area monitoring.

Secure, encrypted data transmissions leverage multiple communications methods. RadHalo monitors the communication channels and automatically switches to other transmission methods if the primary transmission method is unavailable.

Control and manage alarms and settings for RadHalo from your mobile device, Thermo Scientific ViewPoint command and control SW, or your own command and control SW by leveraging the ANSI N42.42 2012 compliant communication transmissions. Whether the situation calls for permanent monitoring of an area or a quick setup for radiological monitoring, there is a RadHalo model to fit nearly any situation or scenario.

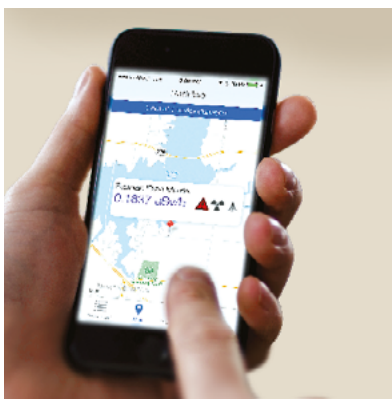

Thermo
SCIENTIFIC

Ordering Information:

**RadHalo RDP – Four Options Available**

RadHalo RDP is designed for portability, rapid deployment, and autonomous operation. It is ideal for monitoring special events and radiological emergencies. Long 60 hr battery can be charged via AC mains or solar panel. Multiple wireless transmission methods insure instrument communications in nearly any scenario. Monitor and control unit remotely from PC or mobile device.

RadHalo FM – Twelve Options Available

RadHalo FM is designed for permanent and constant area monitoring. Able to withstand nearly all environmental conditions and emergency conditions. Battery backup and multiple reachback methods insure full operation even in emergency situations. Simple layout allows field service support and onsite calibrations. Antenna and satellite extension kits for long distance communication capability especially when RadHalo has no view of the sky.

Technical Specifications

Feature	RadHalo RDP	RadHalo FM
Spectroscopic Detector 3x3" NaI	10 nSv/hr to 400 uSv/hr (1 urem to 40 mrem/hr)	
Dual Range GM Tube	0.5 uSv/hr to 10 Sv/hr (5 mRem/hr to 100 Rem)	
Gamma Detection Sensitivity	Identifies Co57 @ 6.6nSv/h moving at 30.5cm/s (1 ft/s) from 100cm (3.3ft) away	
Dose Rate Accuracy	+/- 20% at 661keV (Cs137)	
Neutron Detector (Optional)	CLYC	
Neutron Detection Sensitivity	Detects 1.3 neutrons/s*cm ² moving at 30.5cm/s (1 ft/s) from 100cm (3.3ft) away	
Environmental Resistance	IP66	IP66
Library	49 radioisotopes including all in ANSI N42.34-2006 standard, with version 1.0.0	
Data	Ability to store > 10000 ANSI N42.42 (2012) compliant spectra. Data transmissions 1024 bit encryption	
Rugged Resistance for high wind loads	1m drop onto concrete	Not rated for drops – mounts rated
Temperature Range	-30C to 55C	
Control and Reachback Communications	WiFi, 2.4GHz, optional Cellular optional Satellite	WiFi, LAN, optional 2.4GHz, Optional Cellular, Optional Satellite
Antenna Options	Mounted short range stubbies	Optional 10km directional Yagi or omni-directional
Battery	Lithium Titanate 60 hrs with 3 hr recharge	
Size (fully featured system)	37 lbs (14" DIA base x 30" tall)	50 lbs (24 x 24 x 8")
Control of Peripheral Equipment	None	GPIO, USB
Mounting Options	Freestanding or with tripod	Pole or fence mount
Security	Tamper and tip sensors	Tamper sensors
Transportation	Handle, removable shoulder strap	None

All RadHalo model kits contain: 1. RIIView PC spectra viewer, 2. AC power supply, 3. Quick Start Guide, 4. Android/Apple mobile device application
Accessory kits: 1. Solar Panel kit, 2. Base radio to receive transmissions, 3. radio repeater for increased transmission distance, 4. RDP tripod mount, 5. FM pole/fence/wall mount kit. 6. FM antenna extension kit.

thermoscientific.com/rmp

© 2015 Thermo Fisher Scientific Inc. All rights reserved. Bluetooth is a trademark of Bluetooth SIG, Inc., Bellevue, Washington, U.S.A. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Results may vary under different operating conditions. Thermo Fisher Scientific makes no warranties, expressed or implied, in this product summary. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representatives for details.

Europe, Africa Middle East & Countries Not Listed
Frauenauracher Strasse 96 +49 (0) 9131 998-226
D 91056 Erlangen, Germany +49 (0) 9131 998-172 fax
customerservice.eid.erlangen@thermofisher.com

China
7th Floor, Tower West, Yonghe Plaza +86 10 8419 3588
No.28 Andingem E. Street, Beijing, 100007 China +86 10 8419 3581 fax
info.eid.china@thermofisher.com

Singapore
11 Biopolis Way, Helios, Units #12-07/08 +65 6478 9728
Singapore 138667 +65 6478 9505 fax
info.eid.singapore@thermofisher.com

USA, Canada, Mexico, Central & South America
27 Forge Parkway +1 (508) 553 1700
Franklin, MA 02038 USA +1 (800) 274 4212 US toll-free
customerservice.rmsi@thermofisher.com +1 (508) 520 2815 fax

India
Plot No. C-327, T.T.C. Industrial Area, Pawne +91-22-41578800
Navi Mumbai 400 705, India +91-22-41578801 fax
info.eid.india@thermofisher.com

United Kingdom
Wade Road, Basingstoke, +44 (0) 1256 693960
Hampshire RG24 8PW United Kingdom 44 (0) 1256 334994 fax
customerservice.eid.beenham@thermofisher.com

Thermo
SCIENTIFIC

A Thermo Fisher Scientific Brand